

Wall Mount Enclosure

IP66

CE



Wall Mount Enclosure

Product Introduction

JXF series foundation distribution box has 30 kinds of specifications, using cold rolled steel totally, made by advanced technology and CNC automatic production line which increases its compressive strength and productivity and reduces welding process. The finish is treated by cycle thermosetting epoxy polyester electrostatic spraying and powder coating, nice and durable. The door board of the box is cast by automatic sealing strip casting machine, with the advantages of dust-proof and water-proof. There are outlet holes in the bottom of the box with sealing strip cover, which has IP66 protection level. In the box, there is a mounting board, which enables to fix variety electric elements and components. The door board can open flexibly over 90 degrees, normally even under extrusion, changeable from left to right mutually with high strength. It can not be out of welding and broken. JXF distribution boxes are widely used in field of electrical equipment and supplies. Our market is all over the world, such as Middle Asia, South Asia, Middle East, Africa, South America, etc., and gains definite approval and favorable comments from customers.

Product Features



Sealing Strip



Hinges



Box Body

Cast by Automatic Sealing Strip Casting Machine

Advantages: cast once, crusted by own, water-proof, fire-proof, high temperature resistance, high intensity and fine appearance compared with traditional pasted sealing strip.

Removable Hinge Connected with Locking Nuts

Advantages: normally open even under extrusion, changeable from left to right mutually with fine appearance, high strength, un-welding and un-broken compared with traditional welding hinges.

Processd by CNC Automatic Production Line

Advantages: special curling process, increase the compressive strength of the box, and reduces the welding steps which highly increase more than 20 times productivity than traditional production methods.

Wall Mount Enclosure




The components of the product

Enclosure Body/ Mounting Board/ Lock/ Inlet and Outlet Knockouts/ Inlet and Outlet Hole Sealing Plate/ Seals/ Mounting Fasteners


Product Features

Main Material: Cold Rolled Steel
Protection Level: IP66
Impact Degree: IK10
Main Body Color: PANTONE 427C/RAL7032/RAL7035
Mounting Board Color: PANTONE 166C/
RAL2000/galvanized steel plate

Gland Plate Size

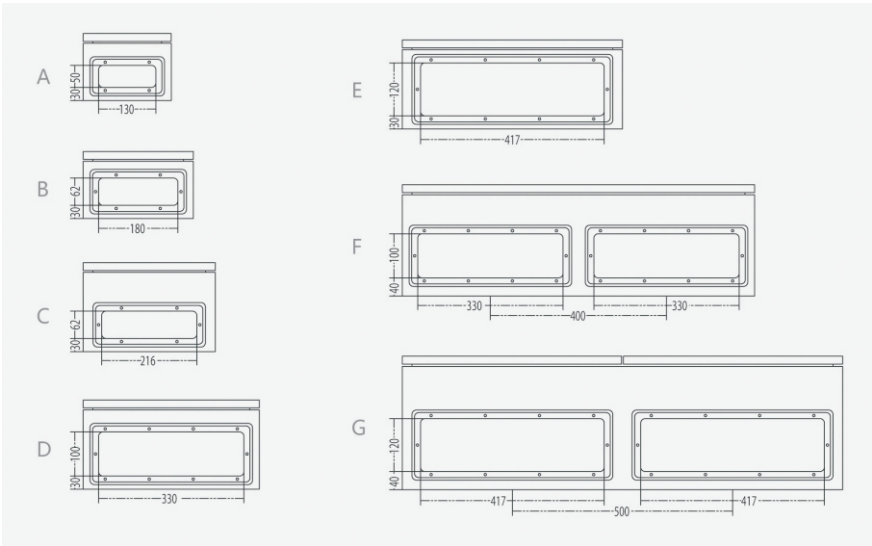

Mounting Plate Size

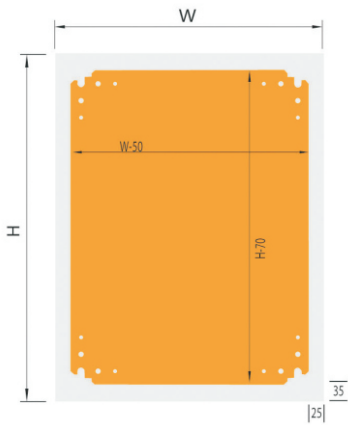

Wall Mount Enclosure



Specification

产品尺寸(mm)			锁数量	进出线孔尺寸
H	W	D	No.of lock	Gland open
200	200	150	1	A
250	200	150	1	A
300	200	150	1	A
300	250	150	1	B
300	300	150	1	C
400	300	150	1	C
400	400	150	1	C
500	300	150	1	C
500	400	150	1	C
500	500	150	1	C
600	400	150	1	C
600	500	150	1	D
300	250	200	1	B
300	300	200	1	C
400	300	200	1	C
400	400	200	1	C
500	300	200	1	C
500	400	200	1	D
500	500	200	1	E
600	400	200	1	D
600	500	200	1	E
600	600	200	1	E
700	500	200	2	E
800	600	200	2	E
800	800	200	2	F
1000	600	200	2	E
1000	800	200	2	F
1200	600	200	3	E
1200	800	200	3	F
400	300	250	1	C
400	400	250	1	D
500	300	250	1	C
500	400	250	1	D

产品尺寸(mm)			锁数量	进出线孔尺寸
H	W	D	No.of lock	Gland open
500	500	250	1	E
600	400	250	1	D
600	500	250	1	E
600	600	250	1	E
700	500	250	2	E
800	600	250	2	E
800	800	250	2	F
1000	600	250	2	E
1000	800	250	2	F
1200	600	250	3	E
1200	800	250	3	F
500	400	300	1	D
500	500	300	1	E
600	400	300	1	D
600	500	300	1	E
600	600	300	1	E
700	500	300	2	E
800	600	300	2	E
800	800	300	2	F
1000	600	300	2	E
1000	800	300	2	F
1200	600	300	3	E
1200	800	300	3	F
600	500	400	1	E
600	600	400	1	E
700	500	400	2	E
800	600	400	2	E
800	800	400	2	F
1000	600	400	2	E
1000	800	400	2	F
1200	600	400	3	E
1200	800	400	3	F
1400	800	400	3	F

Wall Mount Enclosure



The components of the product

产品尺寸(mm)			锁数量	进出线孔尺寸
H	W	D	No.of lock	Gland open
800	600	200	1 or 2	F
800	600	250	1 or 2	F
800	600	300	1 or 2	F
800	600	400	1 or 2	F
1000	600	200	1 or 2	G
1000	600	250	1 or 2	G
1000	600	300	1 or 2	G
1000	600	400	1 or 2	G
1200	600	200	1 or 2	G
1200	600	250	1 or 2	G
1200	600	300	1 or 2	G
1200	600	400	1 or 2	G
800	800	200	1 or 2	F
800	800	250	1 or 2	F
800	800	300	1 or 2	F
800	800	400	1 or 2	F
1000	800	200	1 or 2	G
1000	800	250	1 or 2	G
1000	1000	200	1 or 2	G
1000	1000	250	1 or 2	G
1000	1000	300	1 or 2	G
1000	1000	400	1 or 2	G
1200	1000	200	1 or 2	G
1200	1000	250	1 or 2	G
1200	1000	300	1 or 2	G
1200	1000	400	1 or 2	G
1000	1200	200	1 or 2	G
1000	1200	250	1 or 2	G
1000	1200	300	1 or 2	G
1000	1200	400	1 or 2	G
1000	800	300	1 or 2	G
1000	800	400	1 or 2	G
1200	800	200	1 or 2	G
1200	800	250	1 or 2	G
1200	800	300	1 or 2	G
1200	800	400	1 or 2	G

Wall Mount Enclosure

The Components of the product


Enclosure Body/ Mounting Board/ Lock/ Inlet and Outlet Knockouts/ Inlet and Outlet Hole Sealing Plate/ Seals/ Mounting Fasteners

Product Features

- Main Material: Cold Rolled Steel
- Fixing Board Material: Galvanized Steel or Cold-rolled Steel Plate
- Main Body Color: PANTONE 427C/RAL7032/RAL7035
- Mounting Board Color: PANTONE 166C
RAL2000/galvanized steel plate

Specification

产品尺寸(mm)			锁数量	进出线孔尺寸
H	W	D	No.of lock	Gland open
300	250	150	1	B
400	300	150	1	C
400	300	200	1	C
400	400	200	1	C
500	300	200	1	C
500	400	200	1	D
500	500	200	1	E
600	400	200	1	D
600	500	200	1	E
600	600	200	1	E
700	500	200	2	E
800	600	200	2	E
800	800	200	2	F
1000	800	200	2	F
1200	800	200	3	F

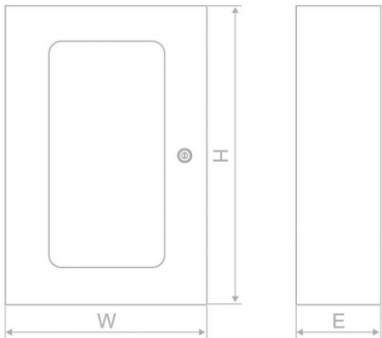

JXF Series Foundation Distribution Box (Flush Mount)



Wall Mount Enclosure



The components of the product

Enclosure Body/ Mounting Board/ Lock/ Inlet and Outlet Knockouts

Product Features

Main Material: Cold Rolled Steel
Fixing Board Material: Galvanized Steel or Cold-rolled Steel Plate (Color: Orange)
Size: Optional 30 Kinds of Specifications
Thickness: 0.7mm/0.8mm/1.0mm/1.2mm/1.5mm or according to customers' requirements
Protection Level: IP55
Impact Degree: IK10
Certification: CCC CE
Main Body Color: PANTONE 427C
Mounting Board Color: PANTONE 166C
Finish Treatment: Standard Cycle Thermosetting Epoxy Polyester Powder Coating, Strong Anti-UV
Advantages: Dust-proof, Water-proof, Fine Appearance and Durable Usage, Removable Hinge connected with Locking Nuts, Flexible Rotation

Specification

宽W x 高H x 深E(mm)	W	H	E	W1	H1	E1
300x400x200	300	400	200	260	360	180
400x500x200	400	500	200	360	460	180
500x600x200	500	600	200	460	560	180
500x700x200	500	700	200	460	660	180
600x800x200	600	800	200	560	760	180

